





Gas Buster Tank General Specification Sheet



Capacity:	500 bbl Rodless closed top Frac tank with gas buster and vent
Axle:	22,500 lb DOT approved air brakes 1 x 22.5 bias ply tires on hub piloted steel wheels
Lighting:	DOT approved lights
Drains:	4" front into sump and one rear of tank with remote handle, plug and chain
Manways:	Front of tank under platform, curbside rear flush with tank floor for easier clean out
Gel Line:	4" at front with valve, plug and chain
Gas Buster:	12" removable with cover. Internal target plate and removable inlet pipe for transportation. Storing points provided. Inlet to front of tank
Vent:	Top rear of tank with baffles to minimize mist and splash
Handrails:	Top front of tank to provide safe access to wind sock and gasbuster of tank
Windsock:	Foldable for transportation
Front Stairway:	22" wide stairway with platform to access top of tank
Dimensions:	45' - 4" L x 11' - 8" H x 8' 5" W
Coatings:	Outside blasted primed and painted Inside blasted and coated with Carboline epoxy coating Undercarriage coated with coaltar epoxy

General Dimensions

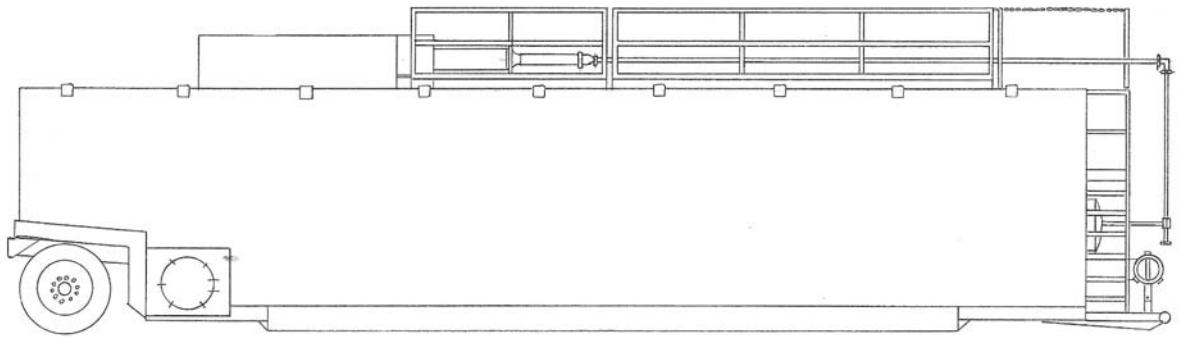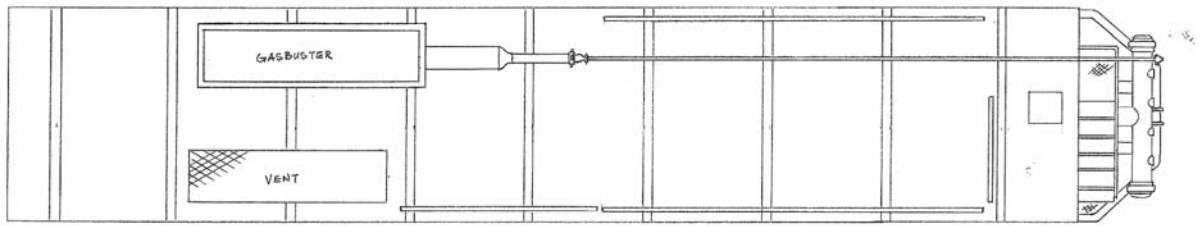

12" REMOVABLE GASBUSTER		
SCALE:	APPROVED BY:	DRAWN BY:
DATE:	REVISED:	REVISED:
WICHITA TANK MFG PROPRIETARY DRAWING		
		DRAWING NUMBER: